







Stĺpový otočný žeriav



Typ	Nosnosť	Výložník	Výška zdvíhu h1				Rýchlosť pojazdu v m/min	Zaťaženie podľa FEM 9.511
			1890	2390	3090	3090		
			Stavební výška jeřábu H (mm)				10	1Am
KC 1.25/2	125	2000	3065	3565	4265	5065	10	1Am
KC 1.25/2.5		2500	3065	3565	4265	5065	10	1Am
KC 1.25/3.2		3200	3065	3565	4270	5070	10	1Am
KC 1.25/4		4000	3095	3595	4295	5095	10	1Am
KC 1.25/5		5000	3095	3505	4295	5095	10	1Am
KC 2.5/2	250	2000	3080	3580	4290	5090	10	1Am
KC 2.5/2.5		2500	3080	3580	4290	5090	10	1Am
KC 2.5/3.2		3200	3415	3915	4610	5415	10	1Am
KC 2.5/4		4000	3415	3915	4610	5415	10	1Am
KC 2.5/5		5000	3415	3915	4610	5415	10	1Am
KC 5/2	500	2000	3080	3590	4290	5090	10	1Am
KC 5/2.5		2500	3455	3955	4655	5455	10	1Am
KC 5/3.2		3200	3455	3955	4655	5455	10	1Am
KC 5/4		4000	3455	3955	4655	5455	10	1Am
KC 5/5		5000	3460	3960	4660	5460	10	1Am
KC 10/2	1000	2000	3630	4135	4835	5635	10	1Am
KC 10/2.5		2500	3630	4135	4835	5635	10	1Am
KC 10/3.2		3200	3630	4135	4835	5635	10	1Am
KC 10/4		4000	3630	4135	4835	5635	10	1Am
KC 10/5		5000	3630	4135	4835	5635	10	1Am
KC 20/2	2000	2000	3815	4315	5015	5815	10	1Am
KC 20/2.5		2500	3815	4315	5015	5815	10	1Am
KC 20/3.2		3200	3815	4315	5015	5815	10	1Am
KC 20/4		4000	3815	4315	5015	5815	10	1Am

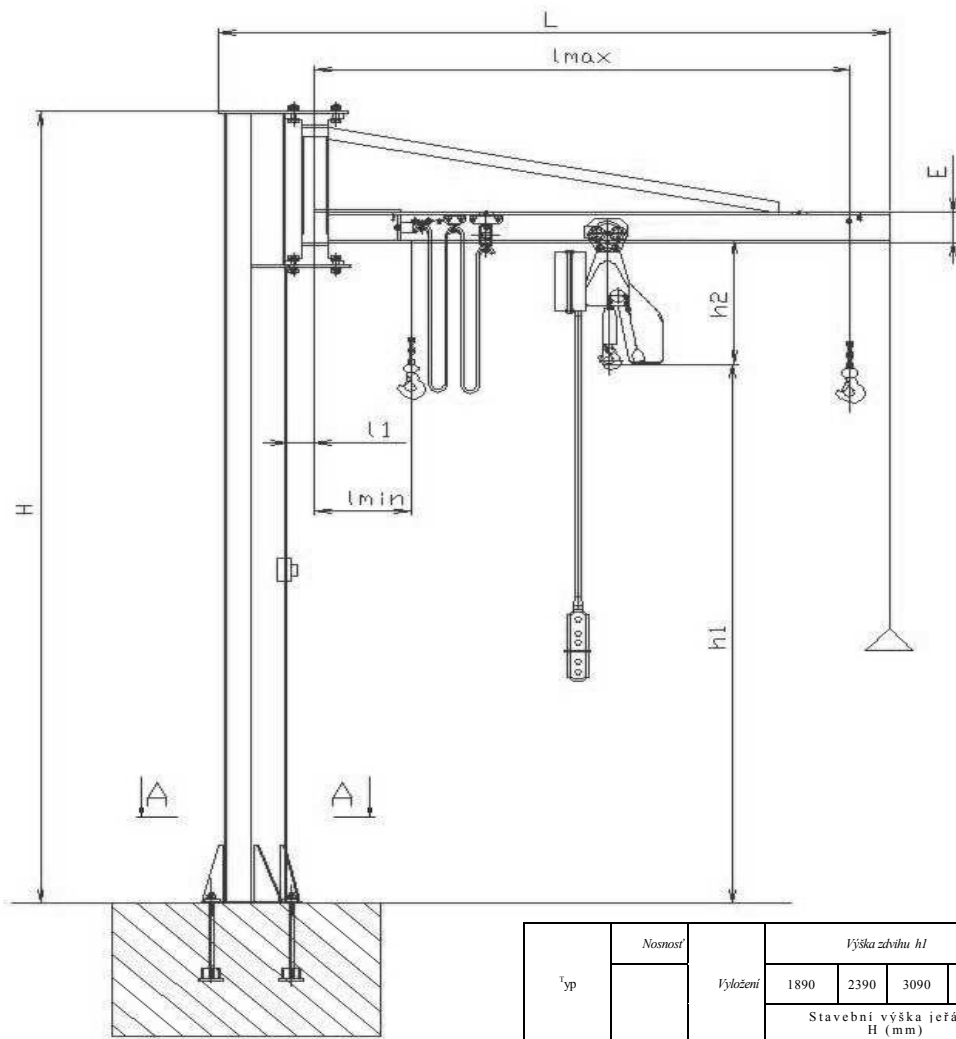